


Precision line regulator PHR

- single stage for mbar applications

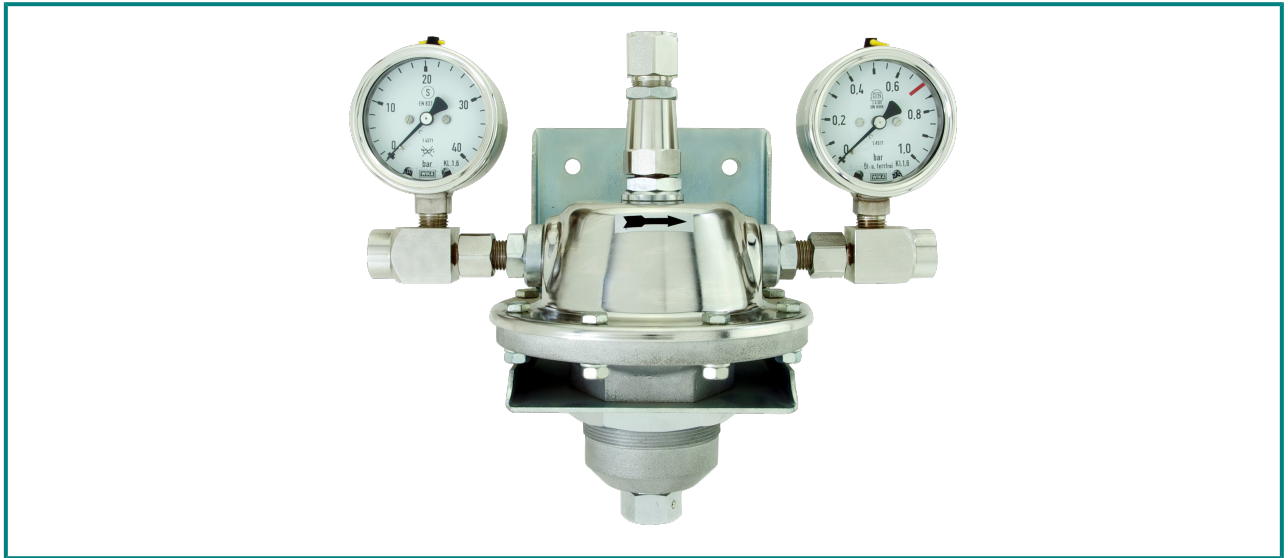

Description:

The excellent gas control characteristics of PHR – even in the mbar area starting with 10 mbar is based on the wide and flexible diaphragm construction.

As an option the PHR regulator can be delivered with in- and outlet pressure indicators or with a wall mounting bracket.

Application areas:

The precision pressure regulator PHR is used particularly in the following areas:

- Laboratories and Industries
- Science and research
- Gas analysis
- Gaschromatography
- Process engineering

Technical details:

Body:	brass or stainless steel electropolished
Seat:	viton
Diaphragm:	viton
Purity:	≤ 5.0
Max.pressure inlet:	16 bar
Pressure outlet ranges:	10 mbar – 2 bar
Flow rate:	10 m ³ /h air
Operating temp.:	-20°C to +70°C
Gauge: (optional)	safety classification accord. EN 837-1 KL1,6
Threads:	inlet G 1/4 f outlet G 1/4 f

Hornung Quality standard

The company Hornung is certified to **DIN EN ISO 9001 and ISO 14001:2009.**



All single parts are manufactured, assembled and tested by in-house production.

The finished parts are therefore under all criteria of German quality control with 100% final inspection.

Hornung GmbH
Rathenaustraße 55, 63263 Neu-Isenburg

Phone: +49 6102 7883-70
Fax: +49 6102 7883-40

www.hornung.org
info@hornung.org

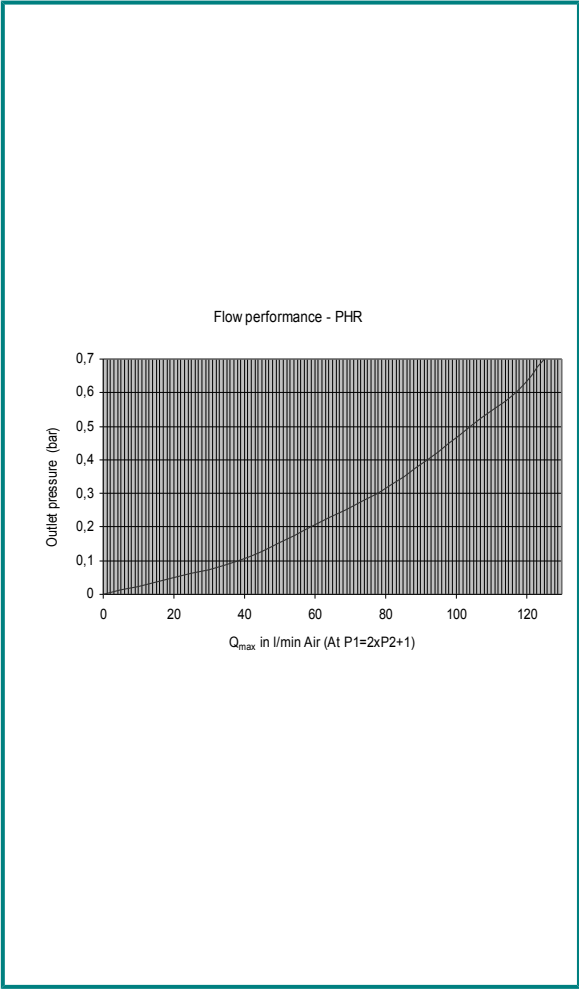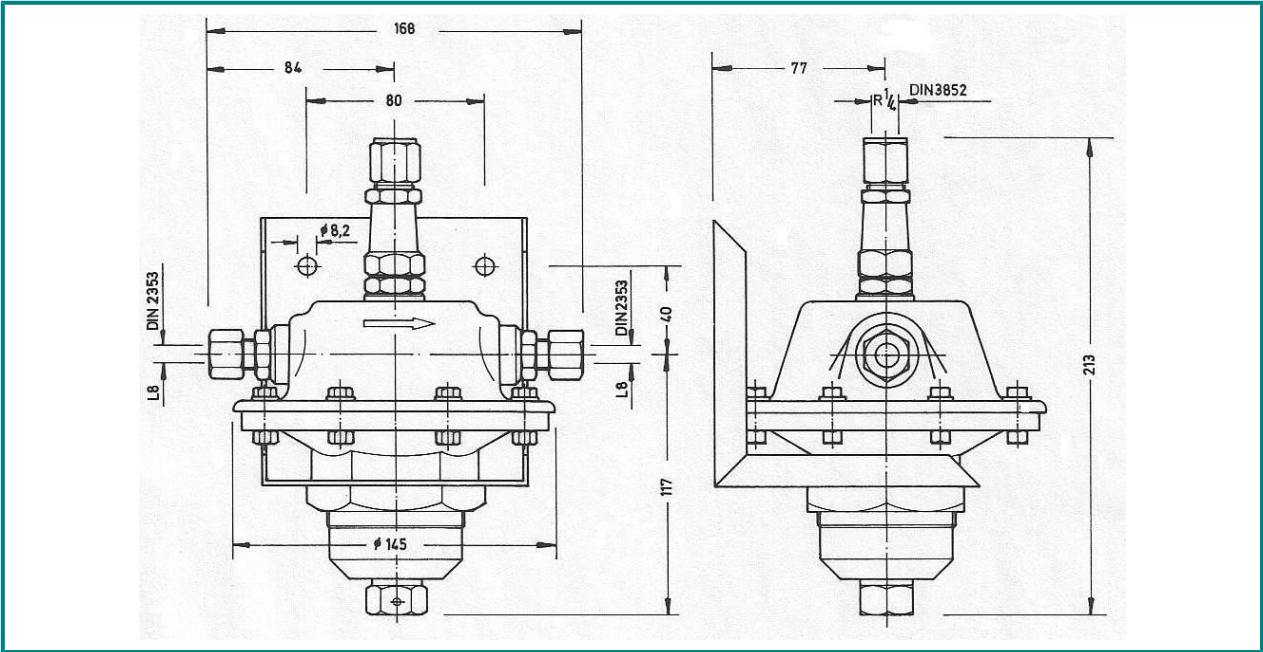

Accessories:

See total catalogue segment

7. Accessories
Gauges, screw connection

Ordering information:

Material:

- 1 = brass
- 2 = stainless steel electropolished

Outlet pressure ranges:

- 1 = 30 mbar
- 2 = 50 mbar
- 3 = 70 mbar
- 4 = 100 mbar
- 5 = 200 mbar
- 6 = 300 mbar
- 7 = 500 mbar
- 8 = 700 mbar
- 9 = 1000 mbar
- 10 = 1500 mbar
- 11 = 2000 mbar

Gauge:

- 1 = without
- 2 = with working pressure indicator
- 3 = in and outlet pressure gauges

Options for in- and outlet:

- 00 = G 1/4" f
- 03 = compression fitting 3mm
- 06 = compression fitting 6mm
- 08 = compression fitting 8mm
- 10 = compression fitting 10mm
- 12 = compression fitting 12mm

Order example:

28-	2	2	2	08	12	Gas
Type	Mat.	Pressure	Gauge	Inlet	Outlet	Gas