


Precision pressure regulator VDS PHR

- dual stage for mbar applications
Inlet pressures up to 300 bar

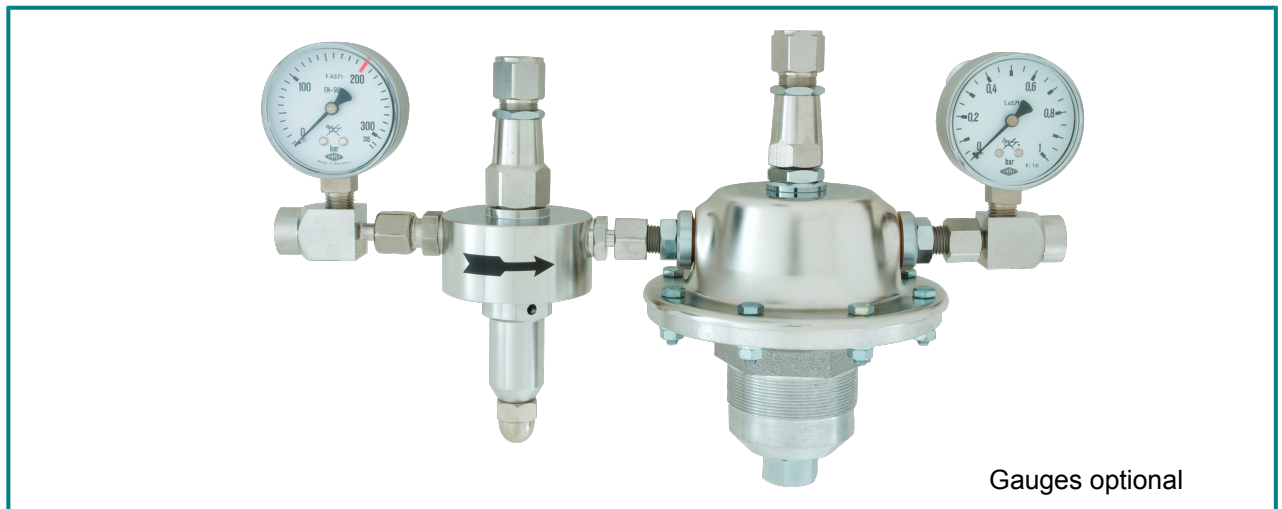

Description:

VDS PHR is a dual stage precision pressure regulator with a wide and flexible diaphragm surface for mbar operating pressures and is often used at science and research institutes or process engineering. Due to dual stage construction it is possible to work with absolutely stable outlet pressure even if there are high inlet pressures and even if the inlet pressure drops down significantly.

For wall mounting of VDS PHR is as an option a bracket available.

Application areas:

- mbar applications with high inlet pressures up to 300 bar
- Instrumentation and process engineering
- Laboratories
- Gas purities up to 5.0 (99.999 Vol.%) purity

Technical Details:

Body:	brass, nickel and matt chrome plated or stainless steel
Seat:	viton
Diaphragm:	viton
Purity:	≤ 5.0
Max. inlet pressure	300 bar
Outlet pressure range	10 mbar – 2 bar
Flow:	10 m ³ /h air
Operating temp.:	-20°C to +70°C
Gauge: (optional)	safety version accord.EN 837-1 KL1,6
Threads:	in- and outlet G 1/4 f

Hornung Quality standard

The company Hornung is certified to

DIN EN ISO 9001 and ISO 14001:2009.



All single parts are manufactured, assembled and tested by in-house production.

The finished parts are therefore under all criteria of German quality control with 100% final inspection.

Hornung GmbH
Rathenaustraße 55, 63263 Neu-Isenburg

Phone: +49 6102 7883-70
Fax: +49 6102 7883-40

www.hornung.org
info@hornung.org

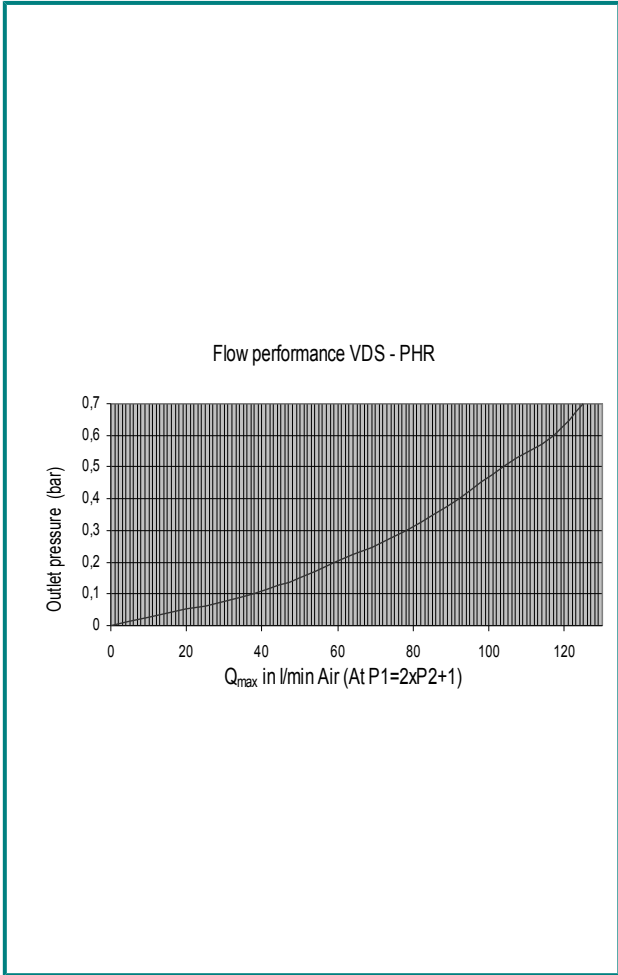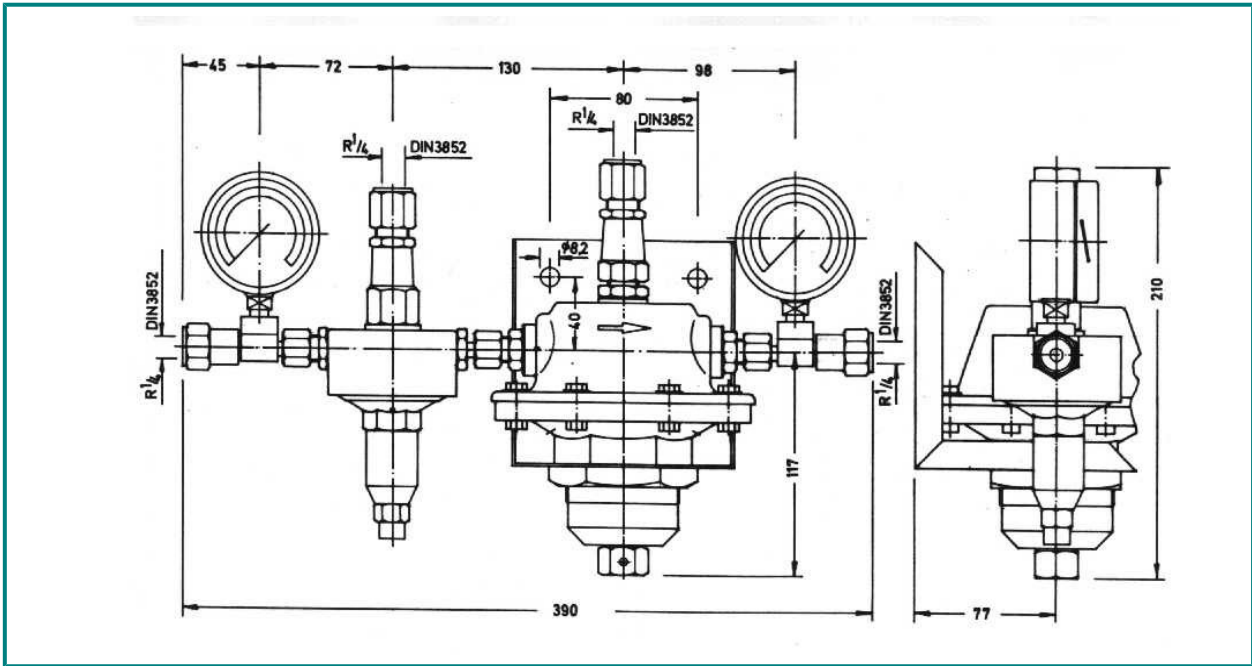

Accessories:

See total catalogue segment

7. Accessories
Manometer, screw connection

Ordering information:

Material:

- 1 = brass
- 2 = stainless steel electropolished

Outlet pressure ranges:

- 1 = 30 mbar
- 2 = 50 mbar
- 3 = 70 mbar
- 4 = 100 mbar
- 5 = 200 mbar
- 6 = 300 mbar
- 7 = 500 mbar
- 8 = 700 mbar
- 9 = 1000 mbar
- 10 = 1500 mbar
- 11 = 2000 mbar

Gauges :

- 1 = none
- 2 = with working pressure indicator
- 3 = with in- and outlet pressure ind.

Options for In- and Outlet:

- 00 = G 1/4" f
- 03 = compression fitting 3mm
- 06 = compression fitting 6mm
- 08 = compression fitting 8mm
- 10 = compression fitting 10mm
- 12 = compression fitting 12mm

Order example:

29-	2	2	2	10	12	Gas
Type	Mat.	Press.	Gauges	Inlet	Outlet	Gas