


# Flowmeter HP 504

- with integrated metering valve

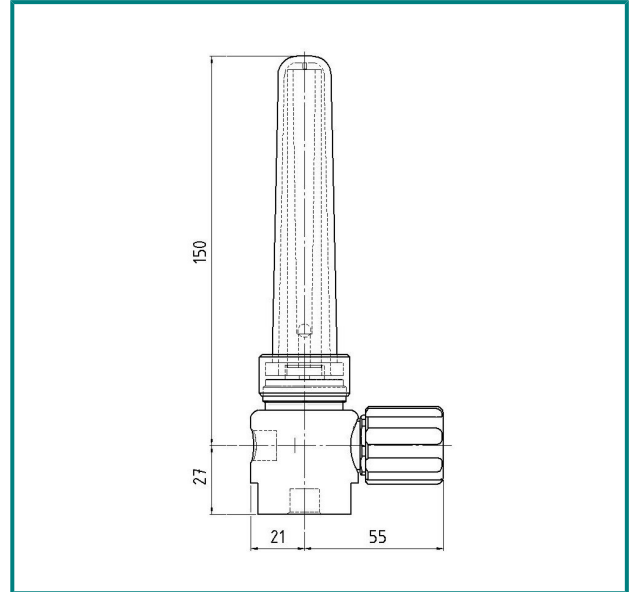

## Description:

HP 504 in stainless steel 1.4404 or Brass consists of a rotameter and a metering valve.

## Application area:

HP 504 is designed for low pressure use of max. 4 bar and will be combined with the outlet of cylinder- or point of use regulators.

## Accessories:

### See total catalogue segment

7. Gauges, screws compression fittings and accessories

## Order details:

### Material:

**HP504** = stainless steel  
**HP504MS** = brass

### Option:

**03** = compression fitting 3mm  
**06** = compression fitting 6mm  
**08** = compression fitting 8mm  
**10** = compression fitting 10mm

HP504-	03	Gasart
Type	Option	Gas type

## Technical details:

Body:	stainless steel 1.4404 electropolished or brass, nickel and matt chrome plated
Gasket:	viton
Leakage rate:	10 <sup>-6</sup> mbar l/s He against atmosphere
Gas purity:	≤ 6.0
Max. inlet pressure:	4 bar
Flow:	depending on gas and selected rotameter
Operating temp.:	-20°C to +70°C
Weight:	570g
Connections:	inlet G 1/4" f outlet G 1/4" f

## Hornung Quality standard

The company Hornung is certified to

**DIN EN ISO 9001 and ISO 14001:2009.**

All single parts are manufactured, assembled and tested by in-house production.

The finished parts are therefore under all criteria of German quality control with 100% final inspection.

Hornung GmbH  
Rathenaustraße 55, 63263 Neu-Isenburg

Phone: +49 6102 7883-70  
Fax: +49 6102 7883-40

www.hornung.org  
info@hornung.org