

EV12 Top-valve

- aluminium version till 12 bar system pressure



Gauge optional

Description:

The cartridge Top-valve was especially developed for gas extraction from cartridges/bottles.

The cartridge top valve can be combined with the cartridge pressure regulator ED06 or with the flow meter E12.

Low weight is a result of ergonomic design and compact dimensions, optimum handling and a minimum on gas-affected surfaces.

The manometer shows the filling pressure of the cartridge.

Technical Details:

Body:	aluminium anodised
Seal:	FPM (FKM / Viton®)
Max. Pressure:	12 bar
Operating temp.:	-20°C bis +60°C
Gauge:	safety version to EN 837-1 KL1,6
Size (BxHxD):	72x64x32 mm
Weight:	115g
Connections:	inlet: UNEF 7/16" outlet: NPT 1/8" f


Hornung Quality standard

The company Hornung is certified to

DIN EN ISO 9001 and ISO 14001:2009.

All single parts are manufactured, assembled and tested in house.

The finished parts are therefore under the criteria of our exact quality control with 100% final control.

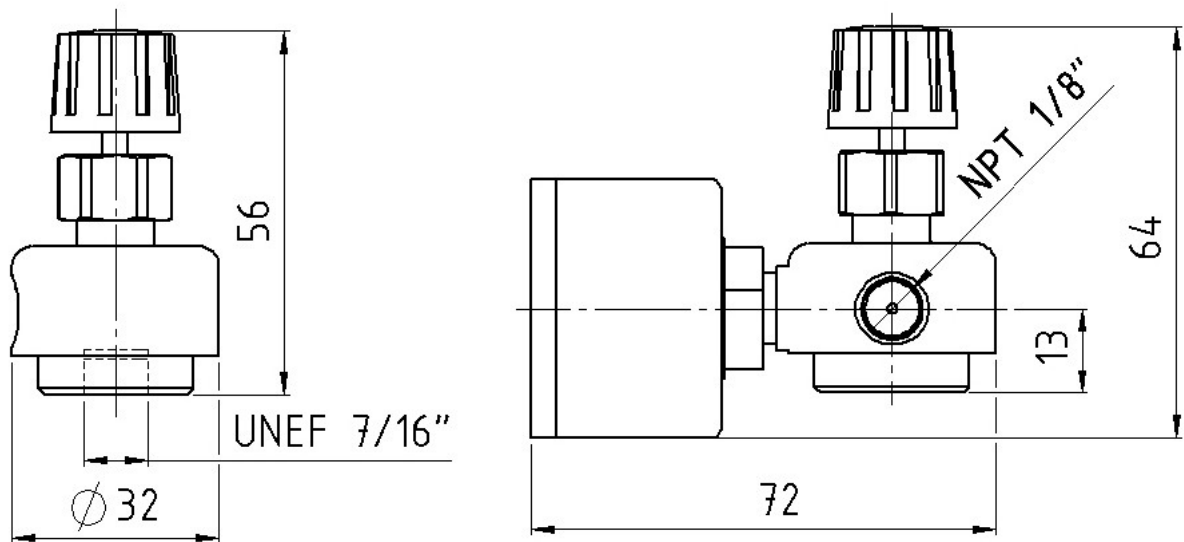

Application area:

Shut off armature for cartridge pressure regulator.

Withdrawal of gas from cartridge pressure regulator.

Order information:

- 0 = with gauge
- 1 = without gauge

Outlet:

- 0 = NPT 1/8" f
- 1 = hose nozzle 3 mm bore
- 2 = compression fitting 3 mm
- 3 = compression fitting 6 mm

Accessories:

see catalogue chapter

7. Accessories

- Hose nozzles
- Friction ring fittings made from plastic
- Friction ring fittings made from stainless steel
- Double nipple NPT 1/8 / UNEF 7/16"

EV12 -	1	1
--------	---	---

Type

Gauge

Outlet

