

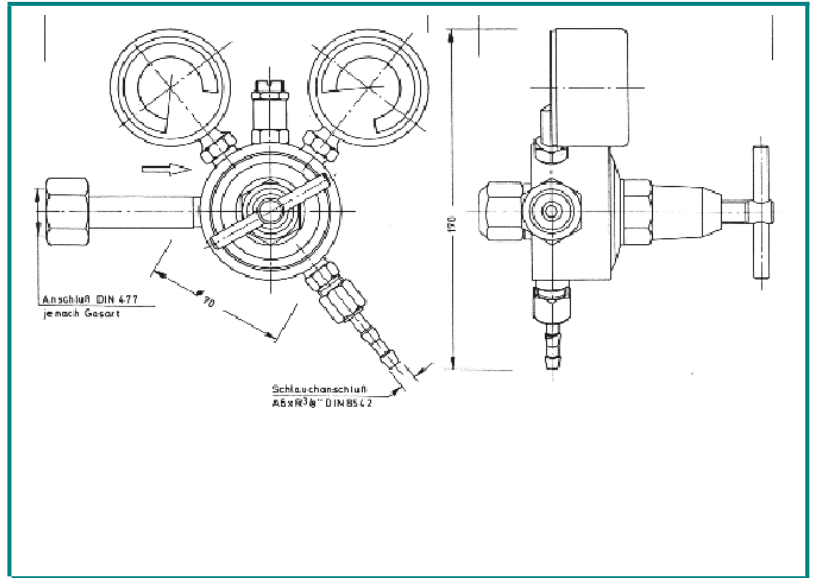


## Cylinder pressure regulator AGR 2/3

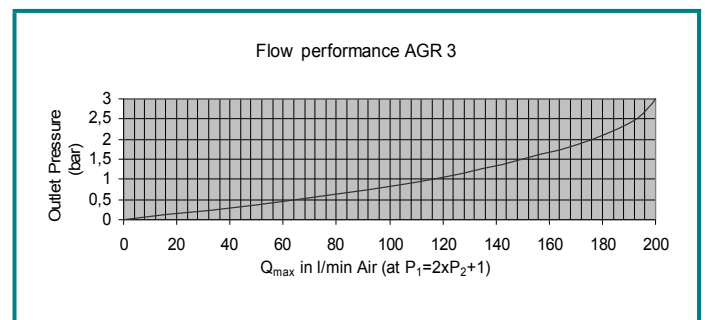

| Model | Gas                            | Inlet pressure P1 | Outlet pressure P2 | Flow rate Q1 | Inlet connection | Outlet connection |
|-------|--------------------------------|-------------------|--------------------|--------------|------------------|-------------------|
| AGR 2 | F, NF, N, NC,T (not Acetylene) | max. 200 bar      | max. 16 bar        | 20 m³/h Air  | Cylinder DIN 477 | Hose DIN EN 560   |
| AGR 3 | F, NF, N, NC,T (not Acetylene) | max. 25 bar       | max. 3 bar         | 3 m³/h Air   | Cylinder DIN 477 | Hose DIN EN 560   |

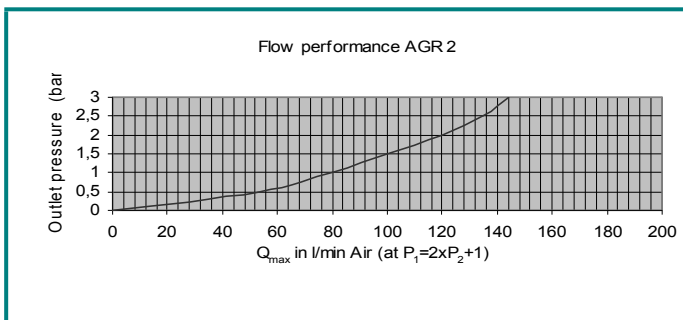

The regulator AGR 2/3 is manufactured in steel C45 or stainless steel 1.4305 for the use in aggressive medium. The gasket and diaphragm material are resistant to the corresponding gas type.

The AGR 2/3 can be delivered with shut-off valve, hand connection, metal diaphragm and purging system.