



Precision pressure regulator FHR 3 / FHR 4

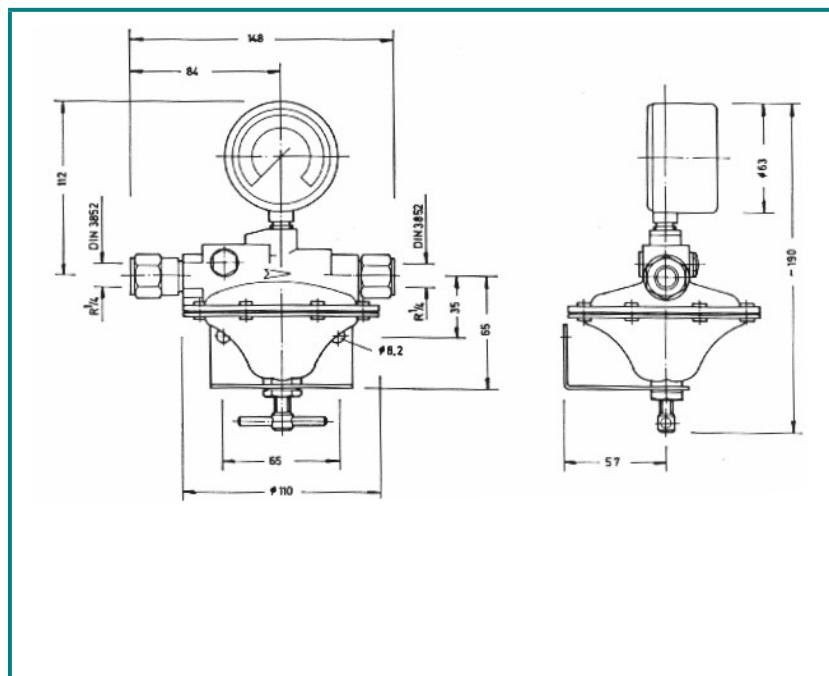

Model	Gas	Inlet pressure P1	Outlet pressure P2	Flow Q1	Inlet connection	Outlet connection
FHR 3	F, NF, NC	max. 16 bar	max. 1 bar	25 m³/h Air	G $\frac{1}{4}$ DIN 3852	G $\frac{1}{4}$ DIN 3852
FHR 4	F, NF, NC	max. 16 bar	max. 1 bar	34 m³/h Air	G $\frac{1}{4}$ DIN 3852	G $\frac{1}{4}$ DIN 3852

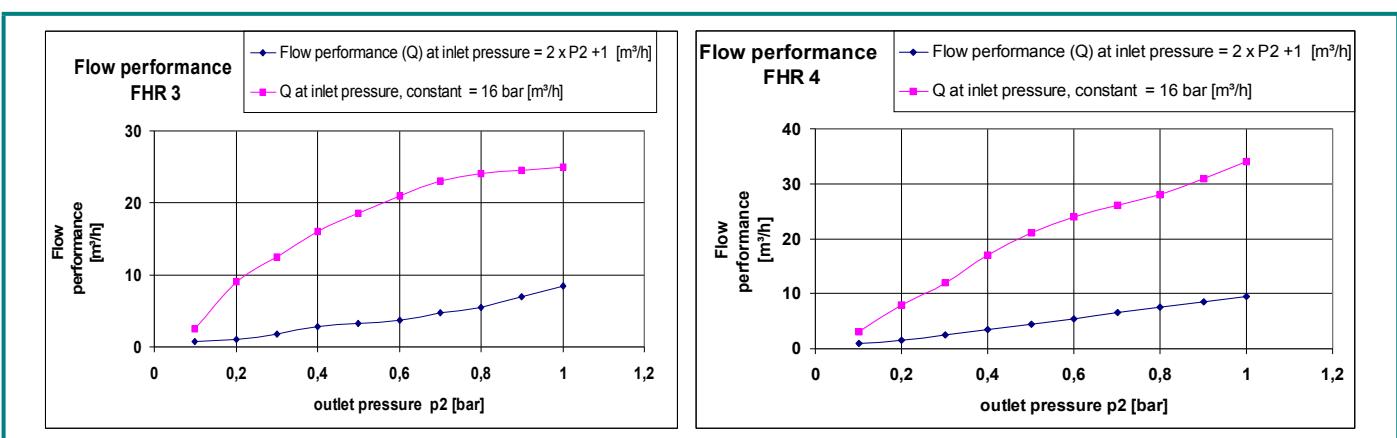

The pressure regulator FHR 3 / FHR 4 is used in the area of laboratory, research and process.

The FHR 3 / FHR 4 is a single stage regulator with cantilever system and a large diaphragm in the second stage which gives an exact regulation of the gas flow.